



# BTC070BE-EBR\$

## ● Feature


1. 7.0" TFT LCD Module
2. Resolution:800\*RGB\*480
3. Display Type:TFT/Transmissive/Normally/white
4. Interface Type: Parallel
5. Controller IC: RA8876
6. Top:-20°C~60°C
7. Support Resistive Touch Panel



## ● Mechanical Data

1. Module(WxHxT)(mm):164.8\*99.8\*9.85
2. Active Area(mm):153.84\*85.632
3. LED Numbers: 24 LEDs

## ● Mechanical Drawing

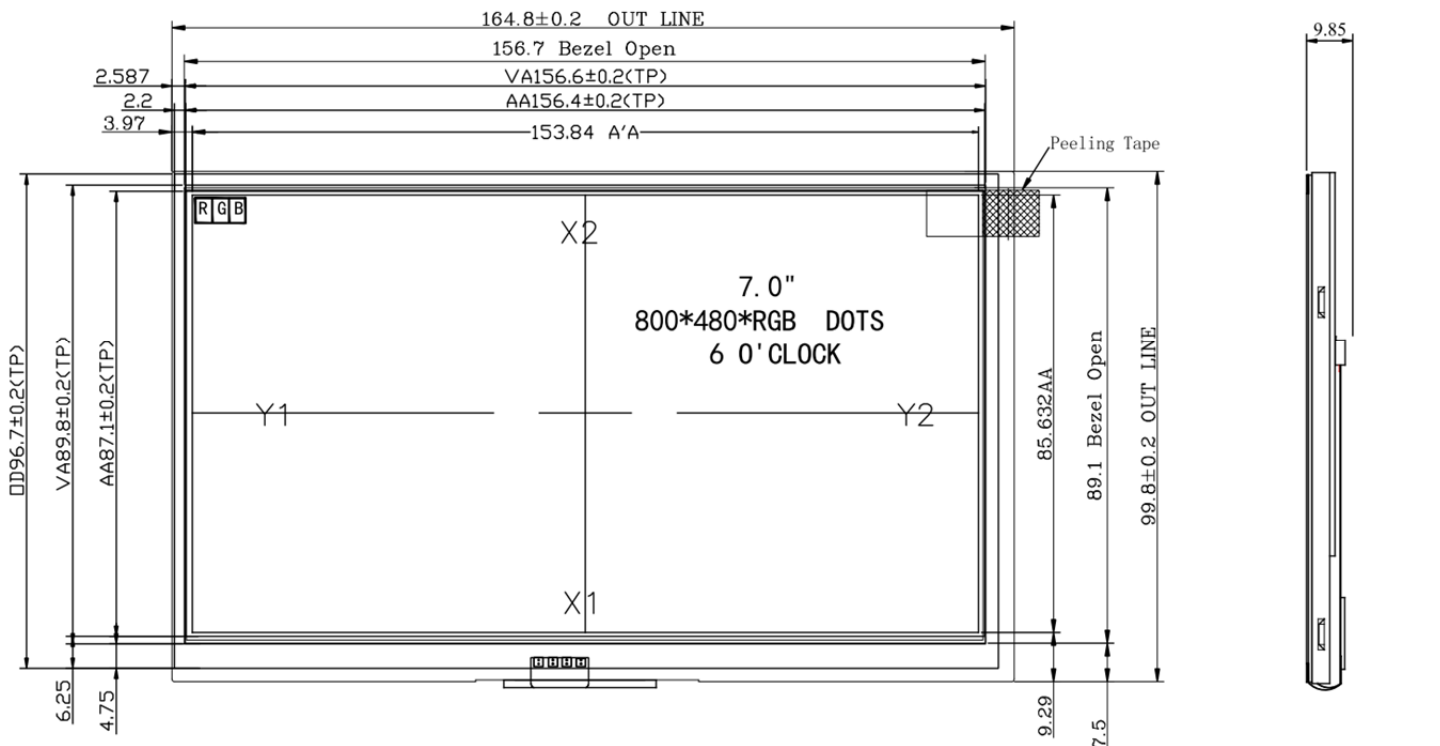

## ● Interface Pin Function

Pin No.	Symbol	I/O Level	Description
1,2	VSS	-	Ground.
3,4	VDD	-	Power supply for Logic,(3.3V).
5	BL_EN	H/L	Backlight control pin. H:On \ L: Off.
6	RS	H/L	H: Data , L: Instruction.
7	/WR	H/L	In 8080 series, this pin is used as /WR signal (data write) , active low.
8	/RD	H/L	In 8080 series, this pin is used as /RD signal (Data Read) , active low.
9	/CS	H/L	Chip Select input, Low active.
10	INT	-	Interrupt Signal Output. The interrupt output for MCU to indicate the status of RA8876.
11	/RST	H/L	Reset signal.
12~27	DB0~DB15	H/L	Data bus line.
28	TP-CLK	H/L	External Clock Input for TP controller.
29	TP-CS	H/L	Chip Select Input for TP controller.
30	TP-INT	H/L	Interrupt output for TP controller.
31	TP-DI	H/L	Serial Data Input for TP controller.
32	TP-DO	H/L	Serial Data output for TP controller.
33,34	VLED+	-	Power supply for backlight driver.(3.0~5.0V)
35,36	VLED-	-	Power supply for backlight driver.(GND)

## ● Electrical Characteristics

### Module

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply Voltage For Logic	VDD	—	3.0	—	3.3	V
Input High Voltage	V <sub>IH</sub>	—	0.7VDD	—	VDD	V
Input Low Voltage	V <sub>IL</sub>	—	VSS	—	0.3VDD	V
Supply Current	I <sub>dd</sub>	VDD =3.3V	—	—	—	mA

### Backlight

Item	Symbol	Min.	Typ.	Max.	Unit
Luminance	L	250	280	—	cd/m <sup>2</sup>