


BE635

µp Display Embedded System

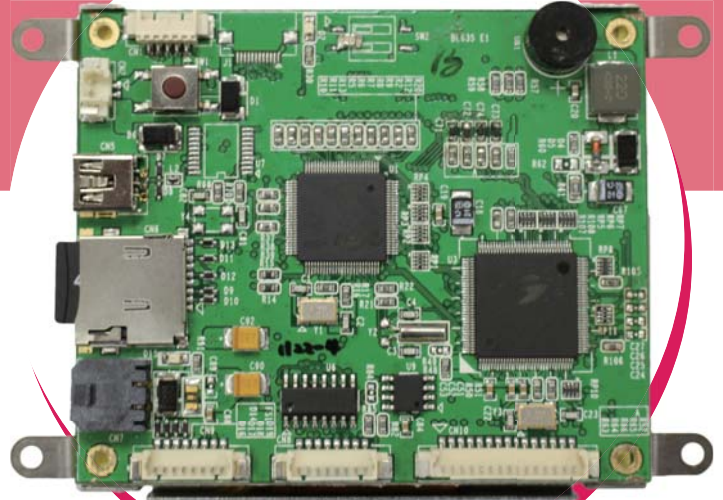

Features

- High performance, PIC32 32-bit microprocessor
- Built-in 512KB ISP flash memory, 64KB SRAM
- Support micro SD
- 1xRS232, 1xSPI, 1xI²C
- 1xRS232/422/485/USB port (selected one from four)
- 1xADC, 12xGPIO
- Built-in Buzzer
- 3.5" TFT-LCD with 320x240 (QVGA) resolution
- Comprehensive set of device library and programming guide for self programming
- RS232/422/485/USB driver, SPI driver, I²C driver, touch panel driver, TFT driver are supported
- Dimension (WxHxD): 93x67x15mm
- Weight: 92g

Hardware Specifications

Processor

- Microchip PIC32 32-bit microprocessor

Memory

- 512KB in-system programmable flash
- 64KB internal SRAM
- 16KB EEPROM

Display

- 3.5" TFT panel 320X240 QVGA
- With LED Backlight

Serial interface

- One full-duplex, four-wired synchronous data transfer SPI port
- One two-wired serial interface (I²C) up to 400KHz data transfer speed

RS232/422/485/USB port

- RS232 (standard)
- RS232/422/485/USB Port (selected one from four)
- Support dual serial port, one is three-wired RS232, the other is selected from RS232/422/485/USB port

External I/O

- Support ADC (1 x channel, 10 bits Resolution)
- Support GPIO (12 x GPIO)

Touch Panel Interface

- Support four-wired resistive touch panel interface

Software Utilities

- Support RS232/422/485/USB driver, SPI driver, I²C driver, touch panel driver, and TFT driver for free

DC Requirement

- DC 5.0 V

